

# Verbatim LED Tube T8 G13 1200mm 22W 1900lm 3000K

- G13 Socket
- 220-240V
- 40,000 hours Lifetime
- Luminous Flux: 1900 lm



<b>Product Number</b>	<b>52700</b>
<b>General Data</b>	
Lamp Socket	G13
Design	LED T8 Tube
<b>Electric Data</b>	
Wattage (W)	22
Voltage (V)	220-240
Dimmable	no
Power Factor	0.90
Operating Frequency (Hz)	50-60
<b>Geometric Data</b>	
Length (mm)	1213
Diameter (in mm)	28 x 32
Weight (g)	350
<b>Photometric Data</b>	
Luminous Flux (lm)	1900
CRI	80
CCT (K)	3000
Beam Angle (°)	120
Luminous Efficacy (lm/W)	86.36
Lifetime (hrs)	40,000
Switching Cycle	100,000
Operating Temperature	-35 - 45°C




04/08/2014

## Lifestyle image




## Technical Drawings

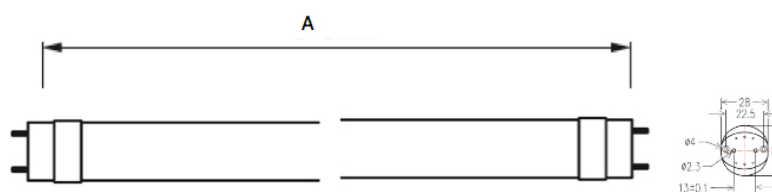

04/08/2014

Photometric Diagrams

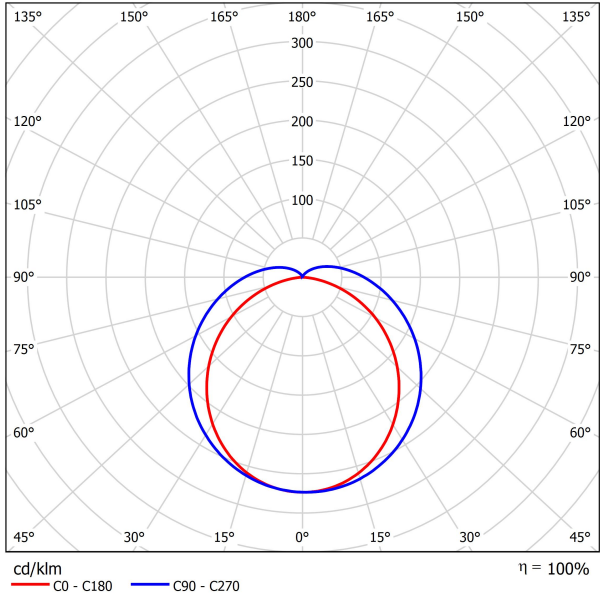


0.5	1.56	E(0°)	1987
	1.36	E(C90)	156
		E(C0)	206
1.0	3.13	E(0°)	497
	2.72	E(C90)	39
		E(C0)	52
1.5	4.69	E(0°)	221
	4.08	E(C90)	17
		E(C0)	23
2.0	6.25	E(0°)	124
	5.45	E(C90)	10
		E(C0)	13
2.5	7.82	E(0°)	79
	6.81	E(C90)	6
		E(C0)	8
3.0	9.38	E(0°)	55
	8.17	E(C90)	4
		E(C0)	6

Distance [m]      Cone Diameter [m]      Illuminance [lx]

— C0 - C180 (Half-value Angle: 107.4°)

— C90 - C270 (Half-value Angle: 114.8°)

Energy Rating

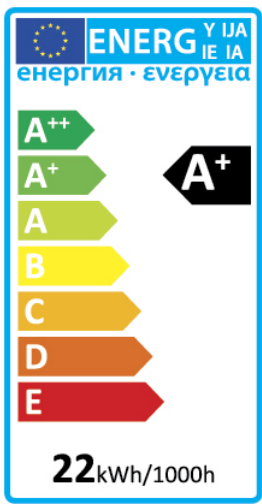

Technical Packaging Details

<b>Barcode</b>
023942527008
<b>EAN 128</b>
(02)00023942527008(37)04(91)803
<b>EAN 14</b>
50023940527003
<b>Pack Dimensions(HxWxL)</b>
35 x 33 x 1295 (mm)
<b>Pack Weight</b>
480 (g)
<b>MOQ</b>
10
<b>Carton Dimensions (HxWxL)</b>
90 x 180 x 1325 (mm)
<b>Cartons/Pallet</b>
36
<b>Layers/Pallet</b>
9
<b>Units/Pallet</b>
360

04/08/2014